


CAM



MASKING TAPE SOLVENT

CLT18 - CLT36 – CLT48

TECHNICAL DATA SHEET

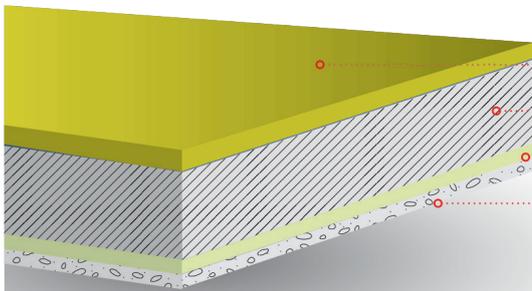

- Release
- Latex Impregnated Paper
- Primer
- Adhesive

DESCRIPTION:

Highest grade automotive masking tape recommended for wet sanding applications. Suitable for aircraft painting. Saturated semi crepe paper masking tape coated with specially developed cross-linked solvent based natural rubber adhesive.

APPLICATIONS:

- Wet sanding water proof
- Guaranteed spray painting oven use in 120°C for 30 minutes.
- Aircraft painting

PROPERTIES:

- Wet sanding.
- 120°C oven use for 30 minutes.
- Suitable for both metallic and plastic surfaces
- Absolute residue free removal
- Various surface options to cover special requirements.
- Excellent tape to tape adhesion
- Solvent and thinner resistant.
- Easy tear
- Excellent conformability
- Suitable for water and solvent based paints
- Easy curving
- Easy application on uneven surfaces

NOMINAL VALUES:

Backing

Impregnated Crepe Paper

Adhesive

Solvent-based, Natural Rubber

Tensile Strength MD

110 ± 30 (N/25mm) TM 5004 by Afera

Elongation at Break MD

10±3(%)

TM 5004 by Afera

Peel Adhesion on Stainless Steel

5 ± 1 (N/25mm) TM 5001 by Afera

Paper thickness

105 ± 15 (mic)

Total thickness

135± 15 (mic)

Application Range

120°C for 30 minutes

Paper color Lime

Adhesive color Transparent