


CAM

MASKING TAPE SOLVENT COT18 - COT24 - COT36 – COT48 TECHNICAL DATA SHEET

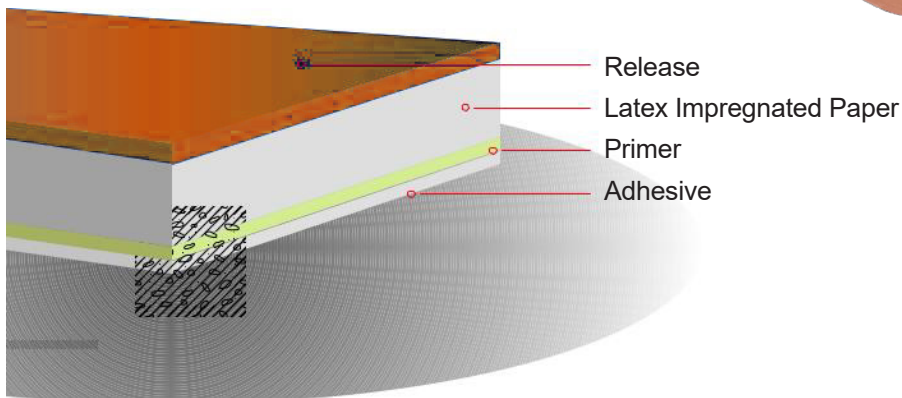

DESCRIPTION:

High-grade automotive masking tape recommended for short-time automotive repair workshops and oven use. Guaranteed for one hour 80°C oven use. Short application highly recommended

APPLICATIONS:

- Guaranteed spray painting automotive oven use in 80°C for 60 minutes.
- General masking
- Domestic DIY and industrial general painting
- Holding
- Sealing
- Fixing
- Light duty packaging

PROPERTIES:

- 80°oven use for 60 minutes
- Suitable for both metallic and plastic automotive surfaces
- Absolute residue free removal in short time applications.
- Suitable for water and solvent based paints
- Easy application on uneven surfaces
- Recommended for short-term application

NOMINAL VALUES:

Backing

Impregnated Crepe Paper

Adhesive

Solvent-based, Natural Rubber

Tensile Strength MD

95 ± 20 (N/25mm) | ~ 21 (lb/in) TM 5004 by Afera

Elongation at Break MD

10±3(%)
TM 5004 by Afera

Peel Adhesion on Stainless Steel

5 ± 1 (N/25mm) | ~ 18 (oz/in) TM 5001 by Afera

Paper thickness

105 ± 15 (mic) | ~ 4,13 (mils)

Total thickness

135± 15 (mic) / ~ 5,31 (mils)

Paper color

Orange 

Adhesive color

Transparent 