




## MASKING TAPE RESIN

CRT18 - CRT24 - CRT36 - CRT48

### TECHNICAL DATA SHEET

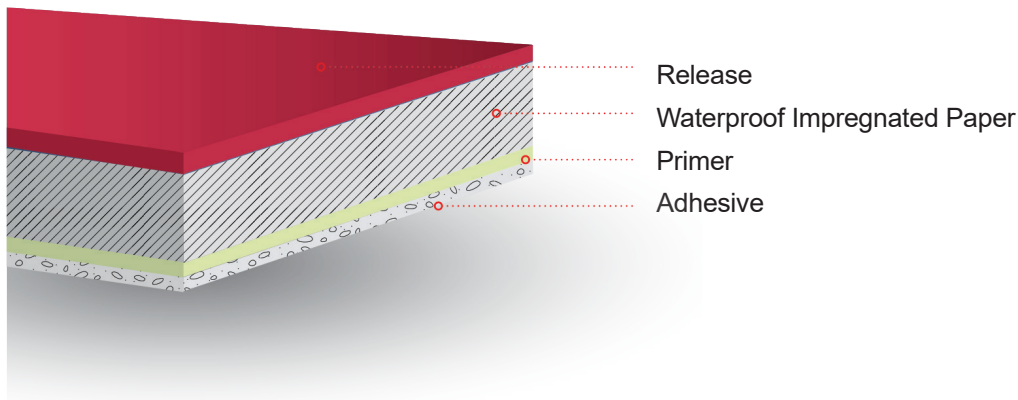

#### DESCRIPTION:

Waterproof masking tape widely used for car repair applications as well as for wall-painting on building and construction sites and industrial use.

#### APPLICATIONS:

- Wet sanding waterproof
- Heat resistant up to 90°C (30 min)
- Automotive painting

#### PROPERTIES:

- Wet sanding
- 90°C oven use for 30 minutes
- Suitable for both metallic and plastic surfaces
- Easy removal without adhesive residue, if it is removed as soon as paint is dry
- Good adhesion on uneven surfaces also
- Natural rubber and resin based adhesive
- Water resistant saturated paper backing
- Compatible with most common paints and lacquers
- Excellent conformability
- Highly resistant to moisture and water
- Removable without breaking
- Hand tearable

#### NOMINAL VALUES:

##### Backing

63 g/m<sup>2</sup> Waterproof Saturated Crepe Paper

##### Adhesive

Natural Rubber and Resin Based

##### Tensile Strength MD

90 (N/25mm) PSTC 101

##### Elongation at Break MD

8% PSTC 131

##### Peel Adhesion on Stainless Steel

4.8 (N/25mm) PSTC 101

##### Total thickness

0.130 mm PSTC 133

##### Application Range

90°C for 30 minutes

Paper color Red ■

Adhesive color Transparent □